



# Double unwinder

## for continuous belt production

● **Mechanische Studien**

● **Realisierungen**

○ **Verkabelung**

○ **Steuerungen**

This unwinder has **2 unwinding axes**. This feature enables **uninterrupted** supply to the production line.

Strip tension is provided by the line. However, the decoiler is equipped with a **web tension control system**, applying a **braking force proportional** to the **measured tension value**.



This ensures **constant web stretching** and controlled end-product quality.

The unwind spindles are mounted on **quick-release bearings** for rapid loading of a new reel into the mandrel. This operation is possible while production continues.

This unit can be integrated into an existing line while complying with new machine regulations, and in particular **operator safety** : **effective enclosure** without sacrificing ease of use, machine enclosure with **anti-closure concept**, machine adjustment outside the enclosure, handling tool for maintenance operations, etc...

SPECIFICATIONS :

- **Coil Ø: up to 900 mm**
- **Coil length: 1,000 mm**
- **Coil weight : 500 Kg**
- **Installation time : 2 days**

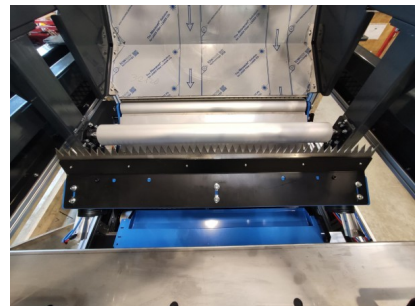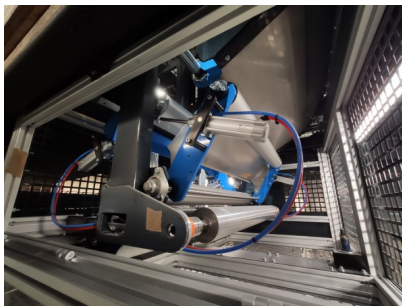

Ref : 3583

Leistung hinzugefügt 10/07/23



**CEREST**

20 Rue des Frères Lumière  
68000 Colmar - FRANCE



**MAIL**

cerest@cerest.com



**TELEFONISCH**

+33 (0)3.89.21.02.56



**INTERNET**

www.cerest.com